

DOI: <http://doi.org/10.21698/simi.2019.ab12>

NEW BIOTECHNOLOGICAL MODEL OF BACTERIA MICRO-ALGAE WASTEWATER TREATMENT

Elena Manea, Costel Bumbac[#], Alina Banciu, Catalina Stoica, Mihai Nita-Lazar

National Research and Development Institute for Industrial Ecology - ECOIND, 71-73 Drumul
Podul Dambovitei Street, code 060652, Bucharest, Romania, costel.bumbac@incdecoind.ro

Keywords: *activated microalgae, wastewater treatment*

Introduction

Conservation of water resources represents one of the socio-ecologic sustainable development priority strategies, wastewater treatment plants ensuring water resources reintegration within the hydrologic circuit. The activated sludge system needs to undergo frequent switch between anaerobic, anoxic and aerobic conditions for biological nutrient removal, thus requiring extra energy and chemicals to fulfil the task, leading to the need for evaluating alternative solutions with reduced operational costs and high efficiencies. The study focuses on assessing the efficiency of microalgae-bacteria granules for wastewater treatment and possibility to use the microalgae-bacteria system as a single step for wastewater treatment.

Materials and methods

The experiments were designed to evaluate the influence of operational parameters on the balance between microalgae and bacterial species in granules. Thus, it was possible to determine the optimal operational parameters and the limiting factors of the process. Several key parameters were varied while monitoring population diversity and dynamics in algae-bacterial granules, including: biomass concentration, pH, light intensity, light-dark sequence. In addition, different wastewater loads have been considered and tested to determine the versatility and adaptability of the technology.

The experiments were carried out in a Biostat®Aplus bioreactor with a useful volume of 1.5 L with stirring system, influent feed pump, effluent discharge pump, influent and effluent tanks, external photosynthetic light source, continuous monitoring for temperature, pH, dissolved oxygen concentration and pH control. The photobioreactor was operated in a sequential regime (feed-reaction-settling-evacuation) in successive 24 hours cycles. No external air source was added to the system, the oxygen required for the aerobic metabolic processes being supplied exclusively through the photosynthesis process performed by the photoautotrophic microalgae in the light phase.

Results and conclusions

During 9 months of operation, different influent organic and nutrients loads were tested to assess the efficiency, performance and limits of the system. The mixer used in the experiments is designed to homogenize mixtures containing microbiological cultures at speeds between 160 and 300 rpm. The gradual increase of the stirring speed was imposed by the increase of the biomass concentration in the reactor, in

conjunction with the increase in diameter of the granules and the need for uniform mixing. The use of this homogenization system at the speed of 300 rpm led to higher biomass concentrations in the upper part of the bioreactor than those near the tank bottom.

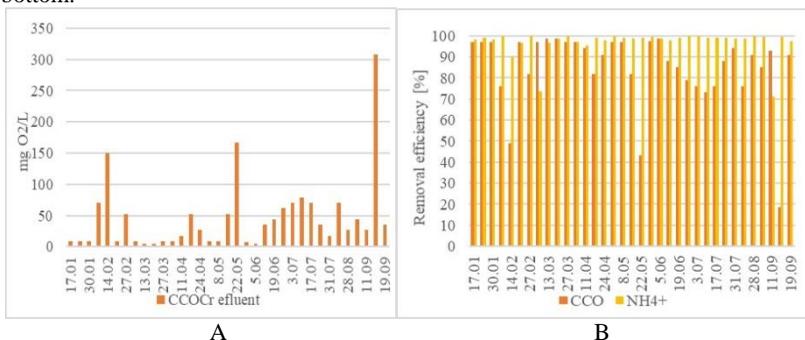


Figure 1. Effluent COD (A) and removal efficiency for COD and NH₄⁺ (B)

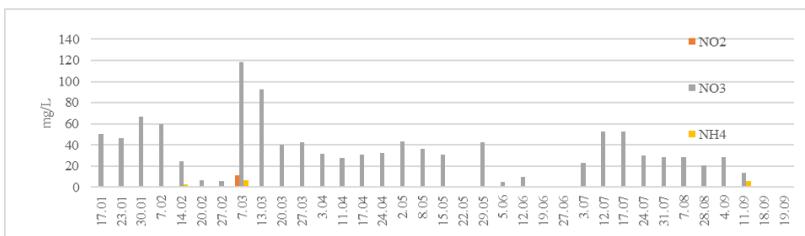


Figure 2. Effluent nitrogen compounds concentrations

The results) showed a good microbial populations adaptability to influent load variations of $\pm 30\%$. The laboratory setup ensures high treatment efficiencies under sequential operation conditions with a 24-hour cycle and a photoperiodicity of 15 h light, 9 h dark leading to an effluent that on average meets the legislation discharge requirements.

Algal-bacterial process biotechnology is a recent low-cost method toward toxic pollutant removal from wastewater that has received more attention in the present scenario. The pollutants are mainly categorized into inorganic, organic, radioactive, acid/base, etc. The water pollutants mainly include SO₂ from power plants, chemical waste, fertilizers from agricultural use, oil spillage, silt, harmful pesticides, detergents, harmful compounds in cosmetics, pathogenic bacteria from livestock operations and food processing wastes, and chemical compounds found in cosmetics products, effluent outfalls PDF | Use of microalgal-bacterial consortium in biological wastewater treatment can represent a feasible alternative for sustainable wastewater | Find, read and cite all the research you need on ResearchGate.Â Keywords: microalgae-bacteria system, dairy wastewater treatment, microalgae recovery. Aims and background. Conventional treatment of wastewater results in continuous production of waste. activated sludge mainly disposed inside the treatment plants premises or landfilled. However, these solutions are not feasible on long term due to the necessity to.Â Algal-Bacterial System: A Novel Low-Cost Biotechnological Initiative in Wastewater Treatment. Chapter. Full-text available. Application Field 1: Wastewater treatment. Application Field 2: Effluents/sewage.Â Latin America leader company in the supply of bacteria and their high activity and high purity metabolites for effluent treatment. BIOLOGICAL SOLUTIONS. We have developed advanced biotechnology for wastewater treatment, several technologies applied in hundreds of real cases. Consult us, our engineers are available to indicate the best solution for your case.Â Essence: Create sustainable operations, biotechnological alternatives, innovations in wastewater treatment, biogas generation and renewable energies on the path of sustainability in finding solutions that preserve natural resources. View this supplier's website. You May Like. Request PDF | On Sep 20, 2019, Elena Manea and others published New biotechnological model of bacteria micro-algae wastewater treatment | Find, read and cite all the research you need on ResearchGate.Â However, these challenges can be overcome by exploring symbiotic potential of microalgae. In a symbiotic system, photosynthetic microalgae co-exist with bacteria, fungi, as well as heterotrophic microalgae. In this consortium, they can exchange nutrients and metabolites, transfer gene, and interact with each other through complex metabolic mechanism. Microalgae in this system, termed as a binary culture, are reported to exhibit high growth rate, enhanced bio-flocculation, and biochemical productivity without experiencing contamination. "One of the factors that significantly impacts algal wastewater treatment is nutrient availability," said Wen Zhang, associate professor in the Department of Civil Engineering. "What is the ideal range of nitrogen-to-phosphorous mass ratio for algal growth? Because previous research failed to identify this, the efficacy of algal treatment has been difficult to predict or optimize." Wastewater quality fluctuates dramatically, which makes it difficult to initiate and maintain algae growth for treatment. Zhang's study now shows that *Chorella vulgaris* could survive even in